## Static Smoke Curtain

BACH SMOKE FIX DA is a Static Smoke Curtain that in case of fire limits and controls the movement of smoke, with classification D180. The smoke curtain delimits the space of the building according to the areas that have been specified to prevent the smoke spreading into other areas. BACH SMOKE FIX DA is a curtain appropriated to industrial buildings or buildings where the rise and fall of the curtains is not a key feature or where the esthetic is not fundamental.

## Tests and Approvals

**BACH SMOKE FIX DA** has a classification of D180, CE Marking, and is tested and approved according to the following standards:

**UNE EN 12101 - 1 : 2007**
Smoke and heat control systems. Specification for smoke barriers .

**UNE EN 12101 - 1 : 2007 (Annex D)**
Temperature / Time resistance tests.

**UNE EN 12101 - 1 : 2007 (Annex C)**
Permeability of materials to smoke.

**EN 13501 - 4**
Fire classification of construction products and building elements.

**UNE EN 12101 - 1 : 2007 (Annex ZA.3)**
CE Certificate of Conformity.

**CE Certificate of Conformity**
Certification Entity:
AFITI – LICOF (member of EFECTIS)

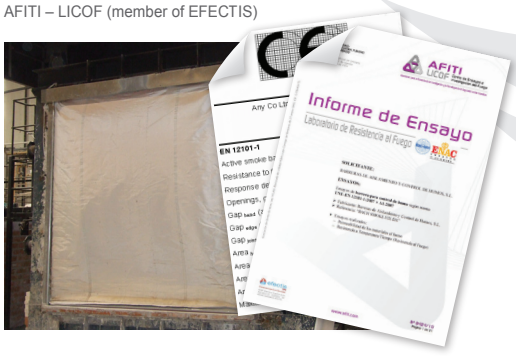




Pol. Industrial Pinares Llanos
C/Camino de Pinares Llanos n.º5
28670, Villaviciosa de Odón (Madrid)

**Phone:** +34 91 616 26 95
**Fax:** +34 91 616 44 22

**Email:** info@bach-sl.com
**Web:** www.bach-sl.com

ISO 9001:2008
9190.BRRR

Version 01
**02/08/2011**

## Technical Drawings

CAD

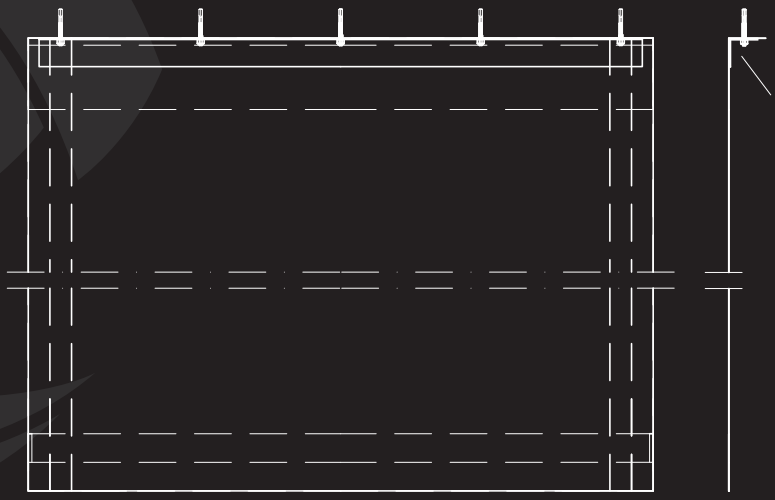


**BOTTOM LEFT SIDE DETAIL**




**BOTTOM RIGHT SIDE DETAIL**



## Technical Characteristics

| | |
|---|---|
| Fabric | BACH SMOKE TEX 600/05: fiberglass resistant to 600ºC.<br>Thickness: 0,43 mm.<br>Color: grey or white. |
| Installation System | |
| Angle "L" 40x40mm<br>Bottom fix | Galvanized angle with 2 mm thick.<br>Steel wire with 3 mm thick. |